
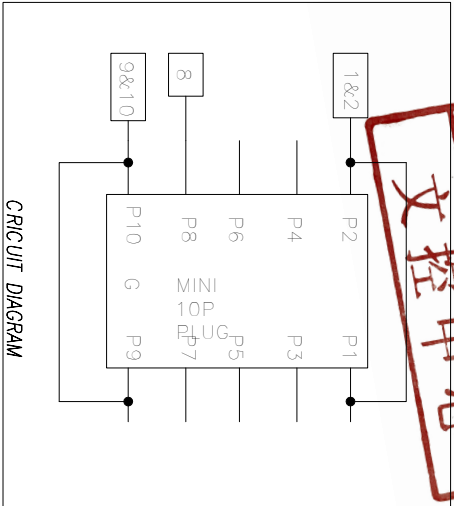
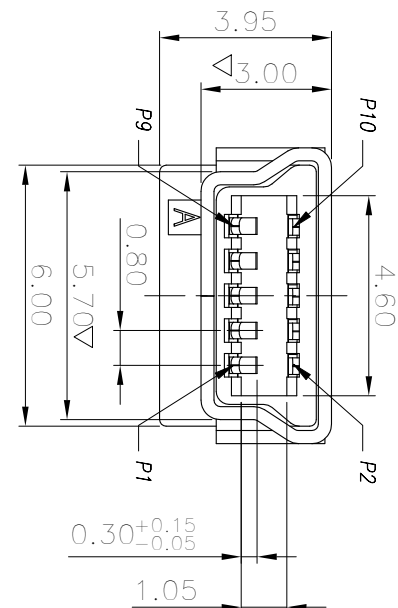


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

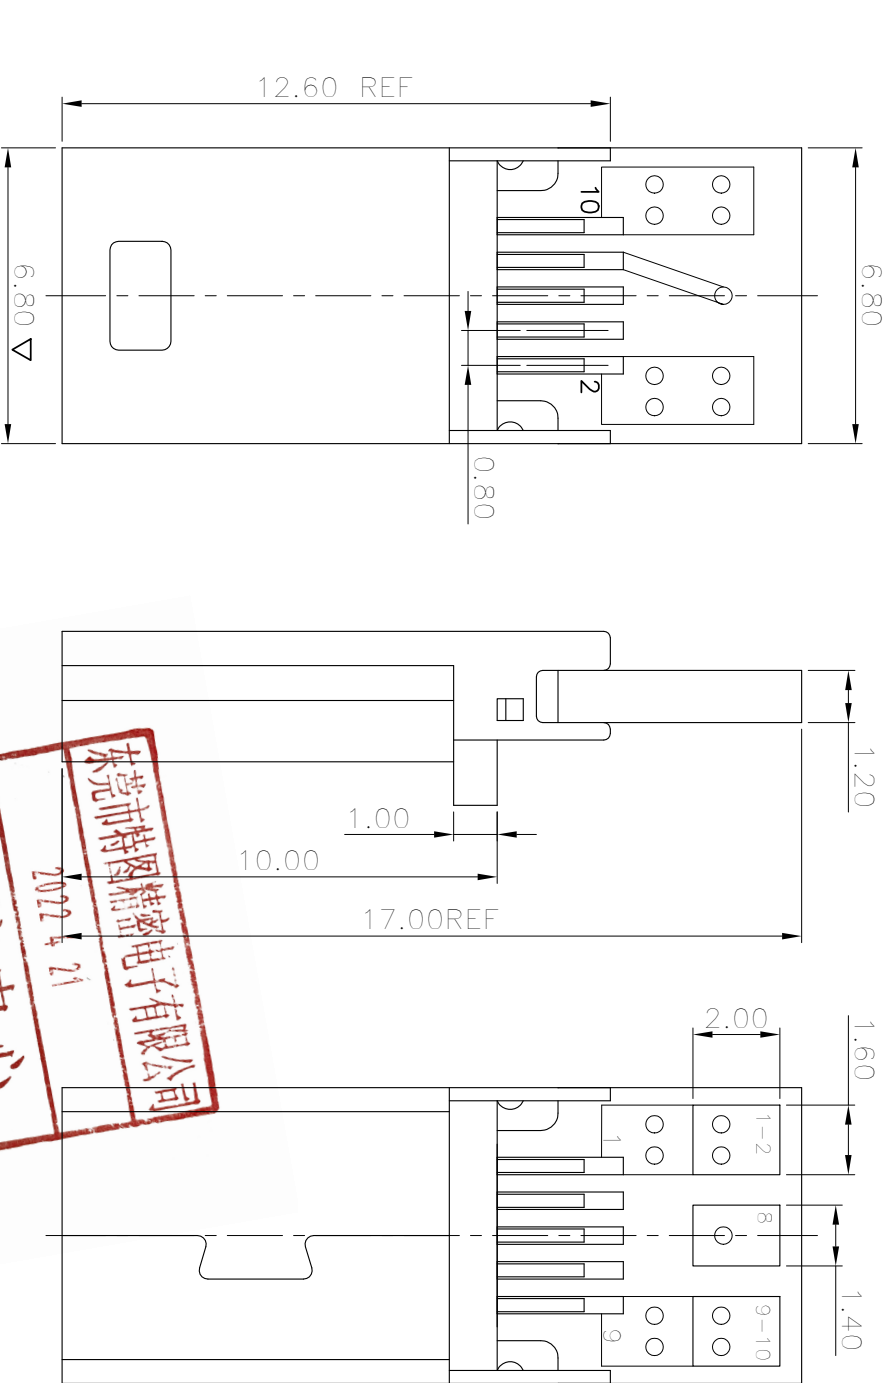

REV.	ECN	NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	MIKE	2020.06.22	
B	MODIFY	BROKEN	2020.12.11	

NOTE:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 30V AC
 - 1-2. CURRENT RATING: 2.0A
 - 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
 - 2-1. MATING&UMMATING FORCE: 0.7kgf~3.5kgf
 - 2-2. DURIBILITY: 10000CYCLES
 3. SALT SPRAY: 24H
 4. OPERATING TEMPERATURE: -40C~85C
 5. ROHS 2002/95/EC COMPLANT.
 6. CRITICAL DIMENSIONS : ▽

D	PCB	1	FR4-1	T-054
C	SHELL	1	SPCC 0.30t	NI
B	CONTACT	10	CS191 0.20t	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated.
A	HOUSING	1	LCP	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE: MINI 10P公头:绿PCB镀金L=17.0 (3点1-2、8、9-10)				
PART NO.		10310026R079		
DWG		BROKEN		
CHKD		2020.12.11		
APVD				
SCALE 1:1		UNIT: mm		
CUSTOMER COPY		SIZE: A4		REV: A

