
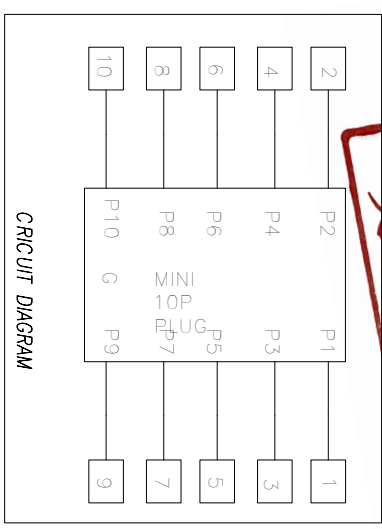


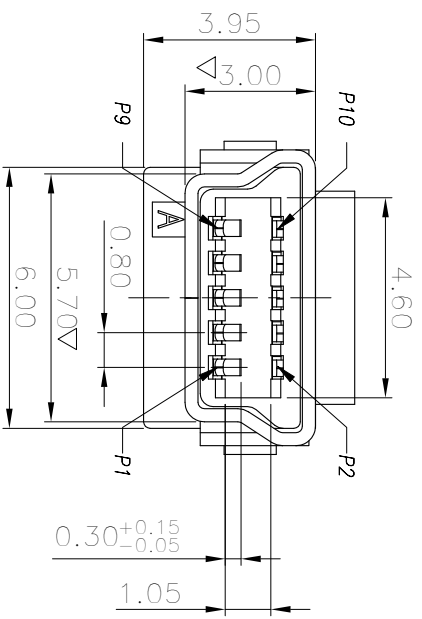

NOTE:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING:30V AC
 - 1-2. CURRENT RATING:2.0A
 - 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
 - 2-1. MATING&UNMATING FORCE: 1.0kgf~2.0kgf
 - 2-2. DURABILITY:10000CYCLES
 3. SALT SPRAY: 24H
 4. OPERATING TEMPERATURE:-40℃~85℃
 5. RoHS 2002/95/EC COMPLIANT.
6. CRITICAL DIMENSIONS : ▽

TITLE:		MINI 100 公头绿PC板壳无刷=15.5 (10点) 小板	
PART NO.	1031002Gf068		
DWN	BROKEN	2015.03.17	
CHKD			
APVD			
SCALE 1:1	UNIT: mm		
CUSTOMER COPY	SIZE: A4	SHEET: 10 of 1	REV: A