

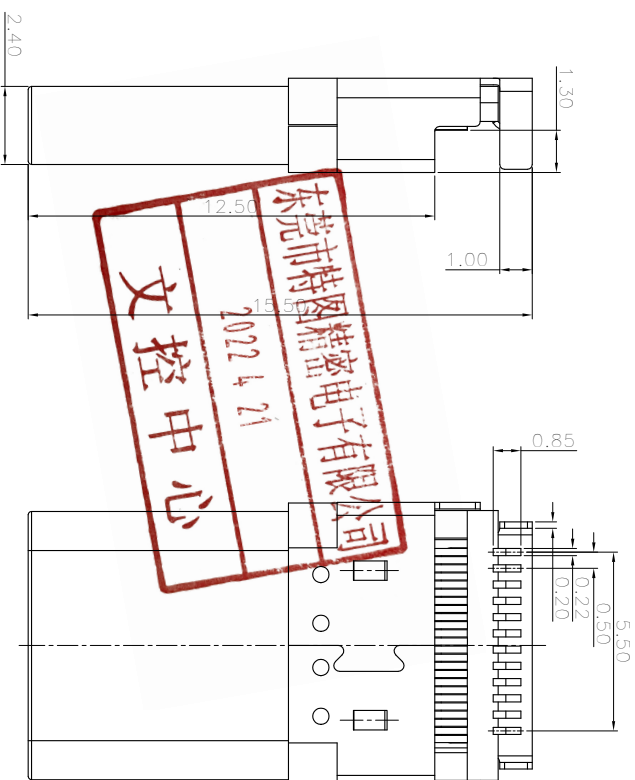
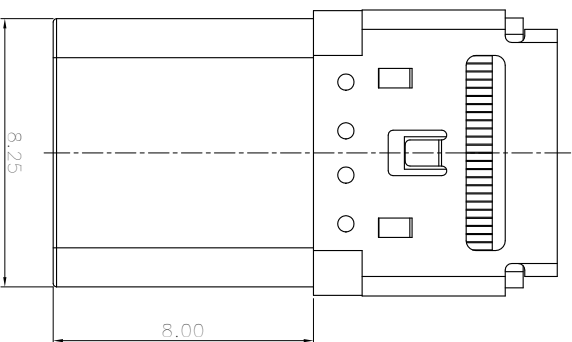
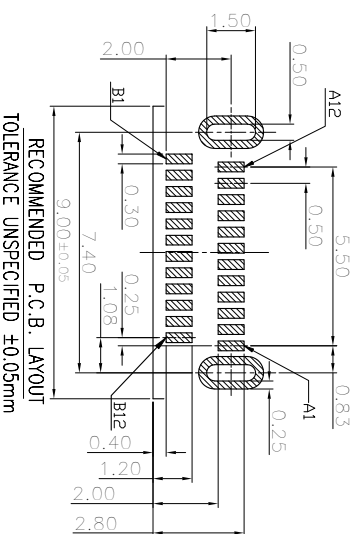


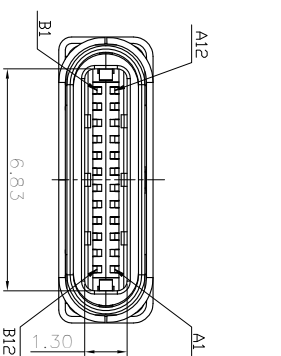

USB TYPE-C FULL-FEATURED PLUG INTERFACE PIN ASSIGNMENTS

1. ELECTRICAL CHARACTERISTICS

- 1-1. VOLTAGE RATING: 20V MAX
 - 1-2. CURRENT RATING:3.0A MAX
 - 1-3. CONTACT RESISTANCE: 40 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC
- FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
 - 2-1. MATING FORCE: 5~20N
 - 2-2. UNMATING FORCE: 8~20N
 - 2-3. DURABILITY:10000 CYCLES
 3. SALT SPRAY: 24H
 4. OPERATING TEMPERATURE:-40℃~85℃
 5. RoHS 2002/95/EC COMPLIANT.
 6. MPQ : 1000PCS/REEL.



D	SHIELD	1	STAINLESS STEEL 0.20t	Ni PLATING
C	GUARD PLATE	1	STAINLESS STEEL 0.10t	Ni PLATING
B	CONTACT	24	COPPER ALLOY 0.15t	Sold On Contact Area Tin plated on Solder Tail All over Nickel Plated .
A	HOUSING	1	THERMOPLASTIC 1094-W0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:	 TETUL 		
X :±0.5	X :±2°	TITLE: USB TYPE C 24P PLUG DIP TYPE PART NO. 1022402E0003 DWG BROKEN 2017.04.11 CHKD APVD SCALE 1:1 UNIT: mm		
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
		 		
		 		

TITLE: USB TYPE C 24P PLUG DIP TYPE	
PART NO.	102240Z0003
DWG	BROKEN
CHKD	2017.04.11
APVD	
SCALE 1:1	UNIT: mm
	