
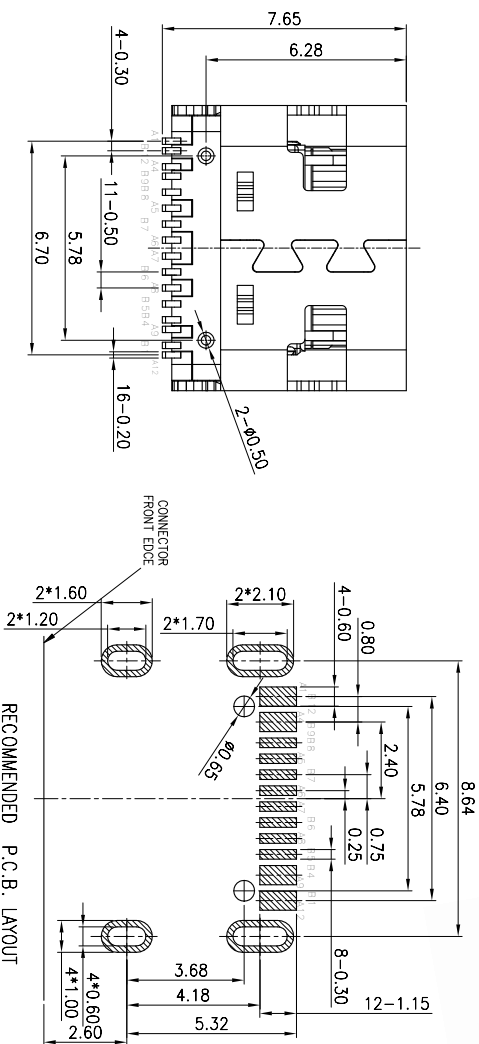
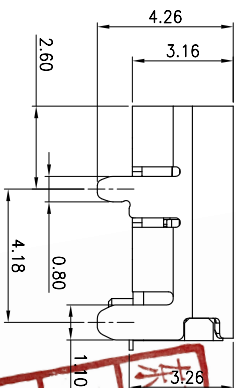
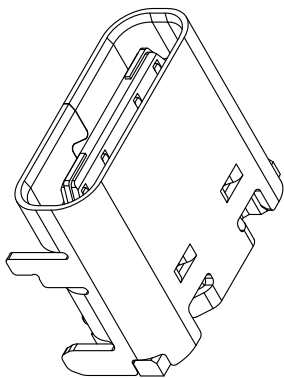


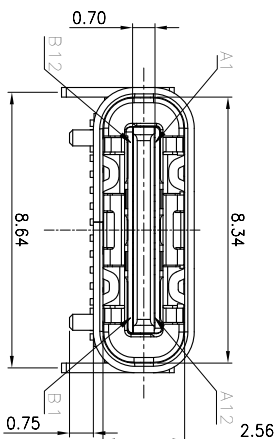

1. ELECTRICAL CHARACTERISTICS
- 1-1. VOLTAGE RATING: 20V MAX
- 1-2. CURRENT RATING: 5.0A MAX
- 1-3. CONTACT RESISTANCE: 40 milliohms MAX.
- 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC
FOR 1 MINUTE.

2-3. DURABILITY: 10000 CYCLES

4. OPERATING TEMPERATURE: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

6. MPQ : 1000PCS/REEL.

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

D	SHELL	1	STAINLESS STEEL 0.30t	Ni PLATING
C	SHIELD	1	STAINLESS STEEL 0.12t	
B	CONTACT	16	COPPER ALLOY 0.12t	Gold Flash On Contact Area Gold plated on Solder tail All over Nickel Plated .
A	HOUSING	1	HIGH THERMOPLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE:		
		USB TYPE C 母 16P SMT板上 標準規格7.35L		
		PART NO.	1021603GR006	
DECIMALS:	ANGLES:	DWG	ZHAKRO	2022.06.15
X : ±0.5	X : ±2°	CHKD		
X.X : ±0.3	X.X : ±1°	APD		
X.XX : ±0.2		SCALE 1:1	UNIT: mm	
		CUSTOMER COPY		
		SIZE: A4	SHEET: 10/1	REV: D