

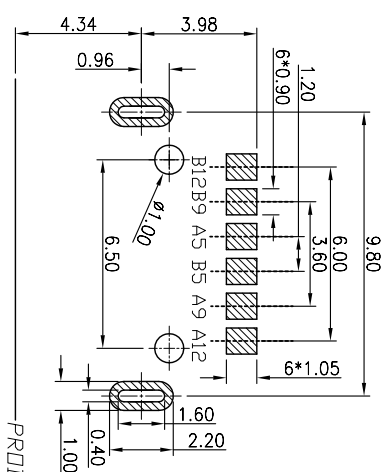
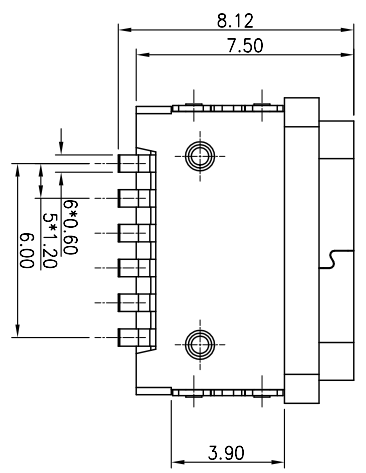
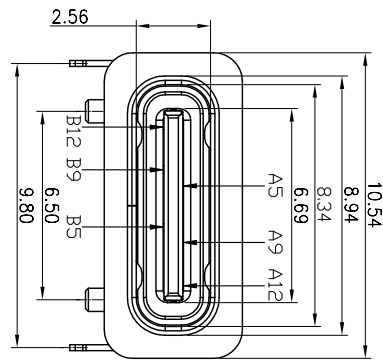



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.


ROHS Compliant

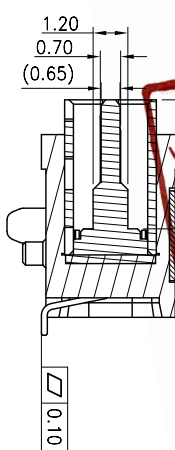

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.8±0.10MM,DEFAULT TOLERANCE:±0.05

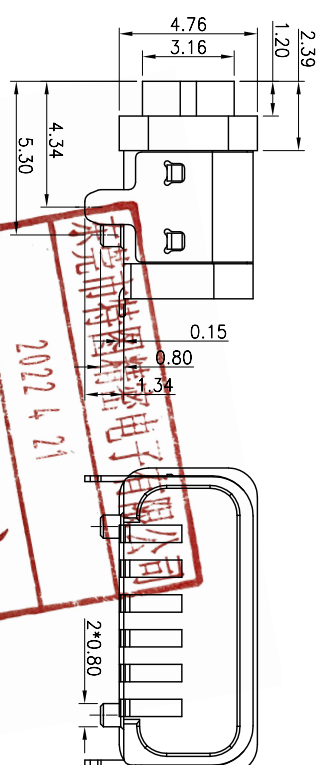


A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME



NOTE:

1. ELECTRICAL CHARACTERISTICS
- 1-1. VOLTAGE RATING: 20V MAX
- 1-2. CURRENT RATING:3.0A MAX
- 1-3. CONTACT RESISTANCE: 40 milliohms MAX.
- 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS
- 2-1. MATING FORCE: 5~20N
- 2-2. UNMATING FORCE: 8~20N
- 2-3. DURIBILITY:10000 CYCLES
3. SALT SPRAY: 24H
4. OPERATING TEMPERATURE: -40°C~85°C
5. RoHS 2002/95/EC COMPLIANT.
6. MPQ : 700PCS/REEL.

D	SHELL	1	SUS201 0.25T	NI										
C	SHIELD	1	SUS201 0.20T	NI										
B	TERMINAL	6	C2680	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated .										
A	HOUSING	1	PA6T	BLACK										
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR										
UNLESS OTHERWISE SPECIFIED TOLERANCES														
DECIMALS:		ANGLES:												
X	:±0.5	X	:±2°											
X.X	:±0.3	X.X	:±1°											
X.XX	:±0.2													
 TITLE: USB TYPE C 母 6P 板 上 插 头 TPX8 SMT+201P 有柱 <table><tr><td>PART NO.</td><td>1020610AR001</td></tr><tr><td>DWN</td><td>KEN</td></tr><tr><td>CHKD</td><td></td></tr><tr><td>APVD</td><td></td></tr><tr><td>SCALE 1:1</td><td>UNIT: mm</td></tr></table> CUSTOMER COPY SIZE: A4 SHEET: 10F1 REV: A					PART NO.	1020610AR001	DWN	KEN	CHKD		APVD		SCALE 1:1	UNIT: mm
PART NO.	1020610AR001													
DWN	KEN													
CHKD														
APVD														
SCALE 1:1	UNIT: mm													

