

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

ELECTRICAL:

1. Rating Voltage: 20V MAX
2. Rating Current: 3A MAX
3. CONTACT RESISTANCE: 40mΩ MAX
4. INSULATION RESISTANCE: 100MΩ MIN
5. VOLTAGE: 100 VAC








MECHANICAL:


1. INSERTION FORCE : 5N~20N
2. UNMATING FORCE : 8N~20N
3. DURABILITY: 10,000 CYCLES

ENVIRONMENT:

TEMPERATURE RANGE: -40 °C ~ 85 °C

MPQ: 500PCS/REEL.

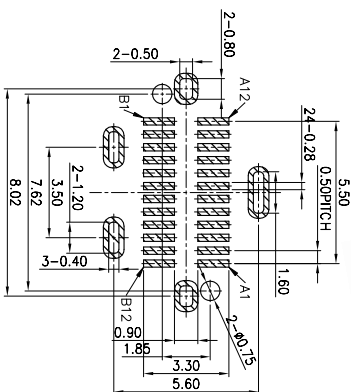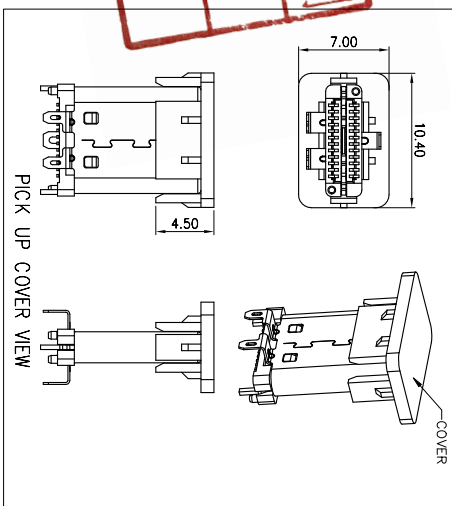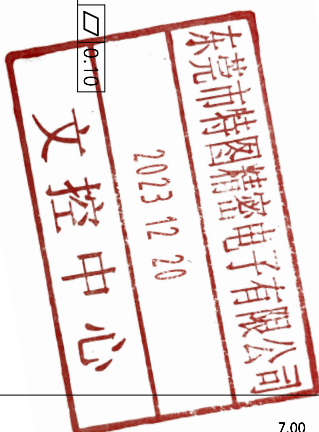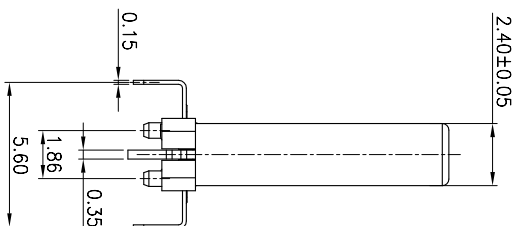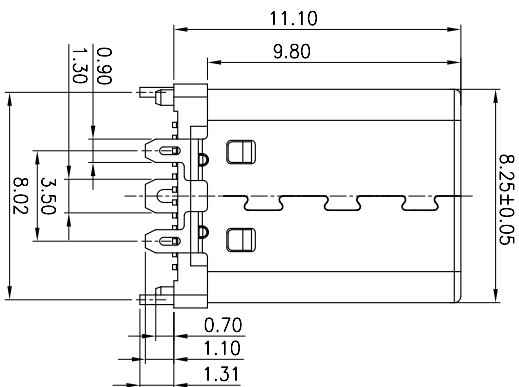

F	COVER	1	LCP	BLACK
E	LATCH	1	SUS301	NI PLATING
D	SHELL	1	SUS301	NI PLATING
C	SPRING	2	SUS304	
B	CONTACT	24	C5191	3u" Gold plated On Contact Area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	LCP	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:			
X : ±0.5	X : ±2°			
X.X : ±0.3	X.X : ±1°			
X.XX : ±0.2				
				
TITLE:USB TYPE C 公 24P SMT直立式 三脚插板(1.1L/204)				
PART NO.	1022406R204			
DWN	ZHAKO 2023.09.16			
CHKD				
APVD				
SCALE 1:1	UNIT: mm			
SIZE: A4	SHEET: 10F2			
REV: A	 			