



1

2

3

4

5

6

7

8

TETULL CORPORATION

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant

1

2

3







4

5

6

7

8

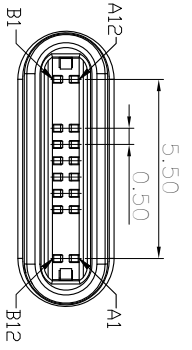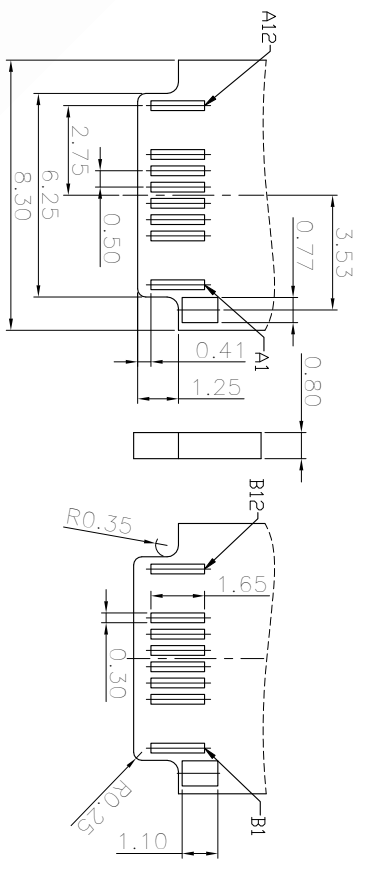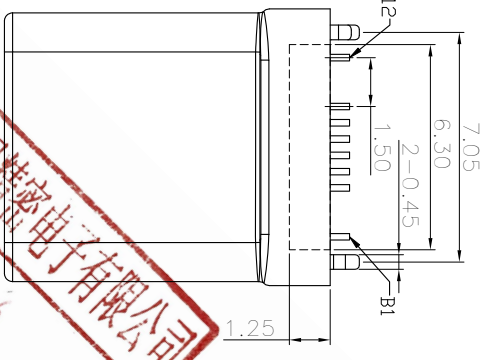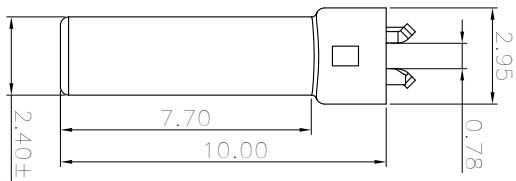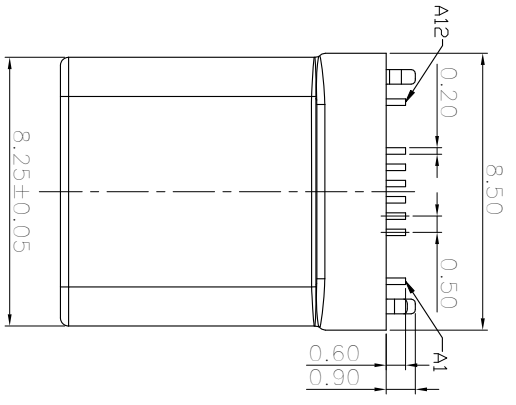

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

RECOMMENDED P.C.B. LAYOUT T=0.8
(TOLERANCE:±0.05)

1.MECHANICAL:
INSERTION: 5~20N
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 10000 CYCLES

2.ELECTRICAL:
CURRENT: 3A FOR VBUS;
1.25A FOR GND PIN.0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40MΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.

3.ENVIRONMENTAL
TEMPERATURE RANGE -40°C ~ +85°C
4.MPQ: 1000PCS/BAG.

D	SHELL	1	SUS	Ni PLATED
C	SHIELD	1	SUS	Ni PLATED
B	CONTACT	16	C2680	1u" MIN GOLD Plated On Contact Area 80u" Min Tin Plated on Solder tail 50u" Min Ni Underplated .
A	HOUSING	1	LCP U94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
				
CUSTOMER COPY		SCALE 1:1		
SIZE: A4		SHEET: 10/1		
REV: B				

REV	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	ZAHKRO	2019.07.09
B	修改PCB接地焊盘位置	CRL	2025.03.06

A

B

C

D

E

F