



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

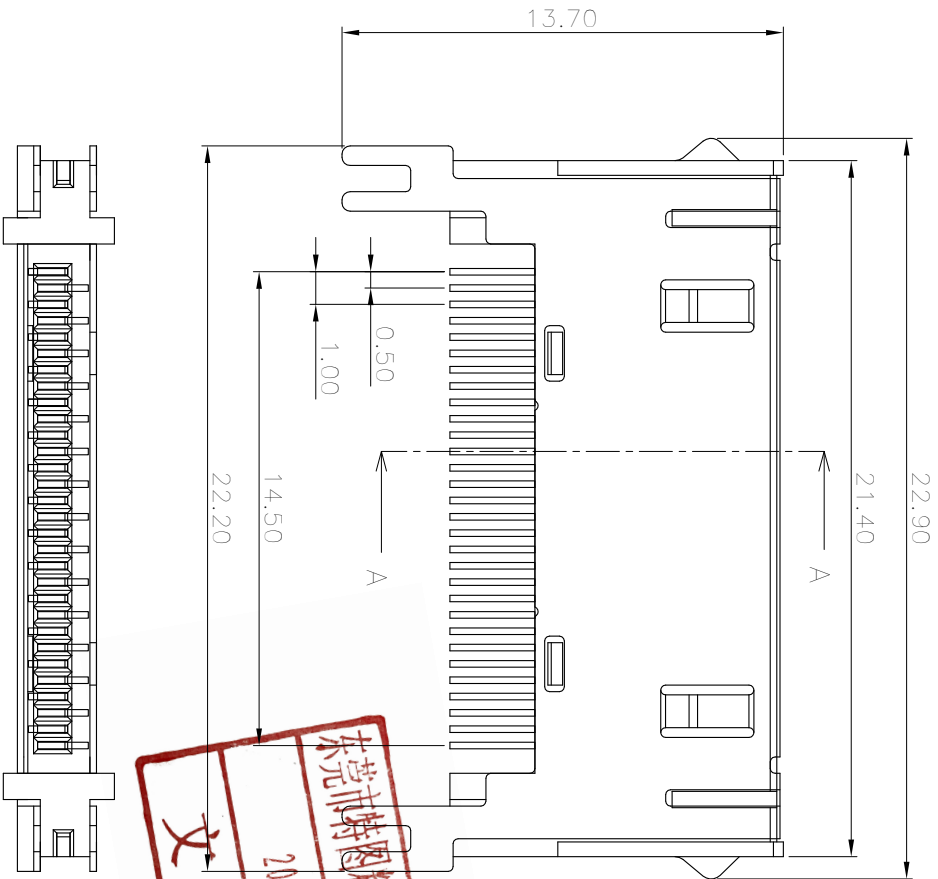

东莞市特图精密电子有限公司  
2022.4.21  
文控中心

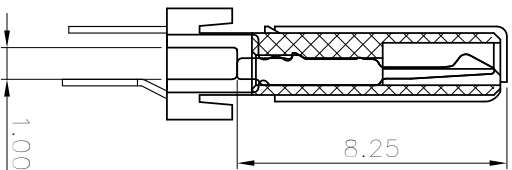

SECTION A-A

- NOTE:
1. ELECTRICAL CHARACTERISTICS
    - 1-1. VOLTAGE RATING: 30V AC
    - 1-2. CURRENT RATING: 1.0A
    - 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
    - 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
    - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR 1 MINUTE.
  2. MECHANICAL CHARACTERISTICS
    - 2-1. DURABILITY: 5000 CYCLES
    - 2-2. OPERATING TEMPERATURE: -40°C~85°C

D	SHELL	1	SUS201 0.2t	Ni PLATING
C	LATCH	2	SUS201 0.4t	Ni PLATING
B	CONTACT	30	BRASS 0.2t	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated.
A	HOUSING	1	ABS 15A1	GRAY
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X : ±0.5 X : ±2°				
X.X : ±0.3 X.X : ±1°				
X.XX : ±0.2				
TITLE: 苹果4公头 夹板式 30P 外壳插脚				
PART NO.		1220808AP003		
DWG		MIKE		
CHKD		2014.05.22		
APVD				
SCALE 1:1		UNIT: mm		
CUSTOMER COPY		SIZE: A4		SHEET: 10F1
		REV: A		

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	MIKE	2014.05.22