

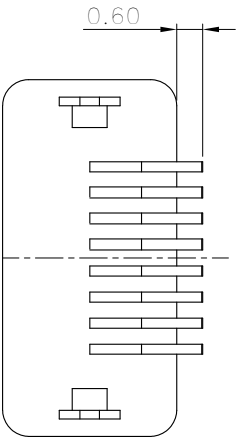



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.



PIN NO.	NAME	PIN NO.	NAME
1	GND	6	DN2
2	DP1	7	DP2
3	DN1	8	ACC2
4	ACC1		
5	PWR IN		

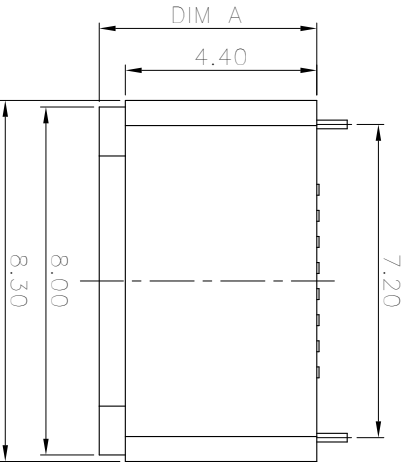



R/N.	DIM A
1221001AR004	4.80
1221001AR005	5.00
1221001AR006	5.50

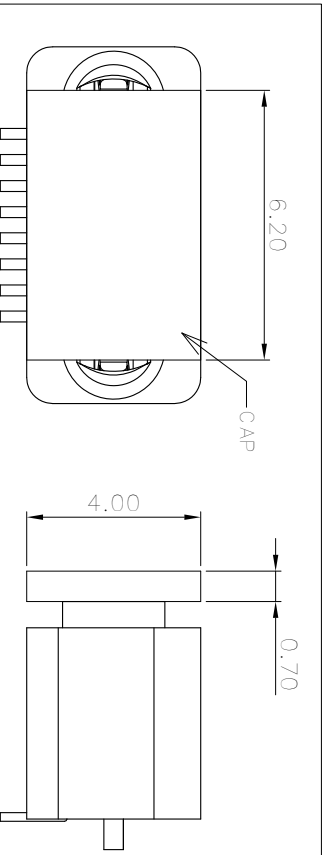

ADD CAP VIEW


NOTE:

- ELECTRICAL CHARACTERISTICS
 - VOLTAGE RATING:30V AC
 - CURRENT RATING:1.5A
 - CONTACT RESISTANCE: 50 milliohms MAX.
 - INSULATION RESISTANCE: 100 Megohms MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS
 - Mating FORCE:15N MAX.
 - UnMating FORCE:3N MIN.
 - DURIBILITY:5000CYCLES
 - OPERATING TEMPERATURE:-40°C~85°C
 - MPQ : 1000PCS/REEL.

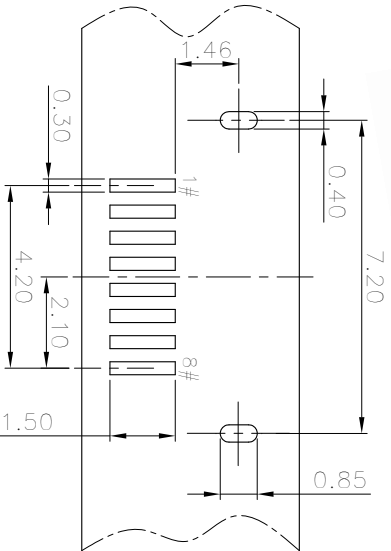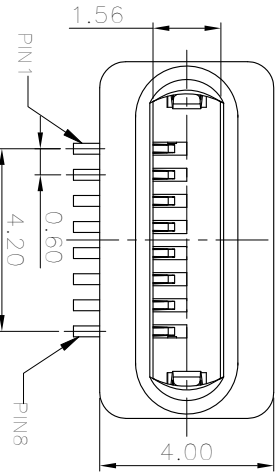

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	MIKE	2019.05.22

D	CAP	1	THERMOPLASTIC U94-10	BLACK								
C	LATCH	1	STAINLESS STEEL 0.20t	NI PLATING								
B	CONTACT	8	COPPER ALLOY 0.20t	Gold Flash on Contact Area Tin plated on Solder tail All over Nickel Plated.								
A	HOUSING	1	THERMOPLASTIC U94-10	WHITE								
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR								
UNLESS OTHERWISE SPECIFIED TOLERANCES												
DECIMALS:		ANGLES:										
X	:±0.5	X	:±2°									
X.X	:±0.3	X.X	:±1°									
X.XX	:±0.2											
 TITLE: 0.6 Pitch 8P I/O CONN 180° SMT TYPE <table><tr><td>PART NO.</td><td>1221001AR00X</td></tr><tr><td>DWN</td><td>MIKE</td></tr><tr><td>CHKD</td><td>2019.05.22</td></tr><tr><td>APVD</td><td></td></tr></table> SCALE 1:1 UNIT: mm 					PART NO.	1221001AR00X	DWN	MIKE	CHKD	2019.05.22	APVD	
PART NO.	1221001AR00X											
DWN	MIKE											
CHKD	2019.05.22											
APVD												

