

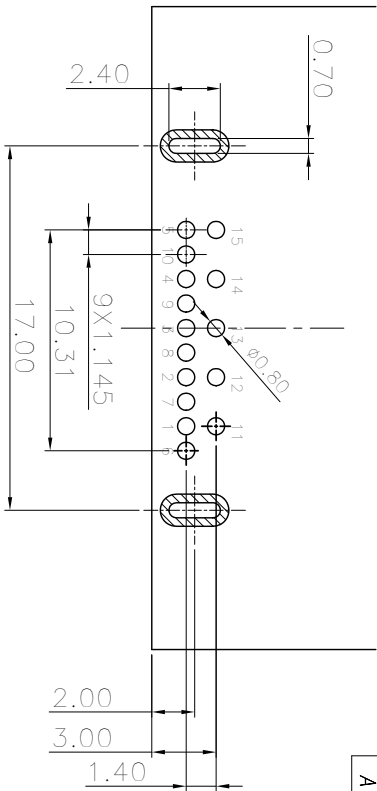
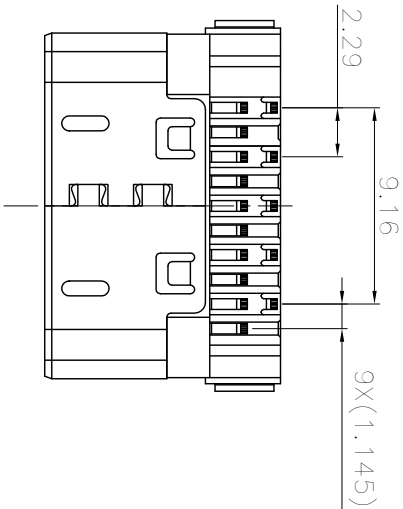
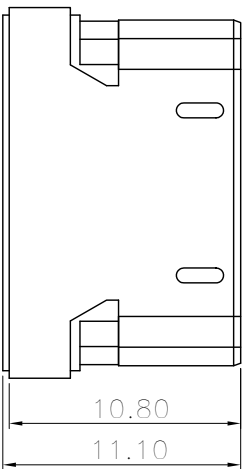
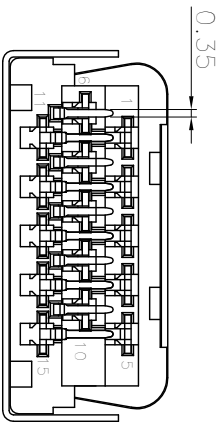


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant

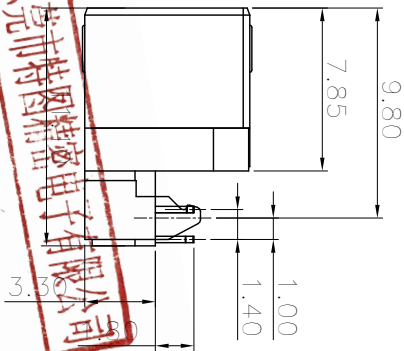


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

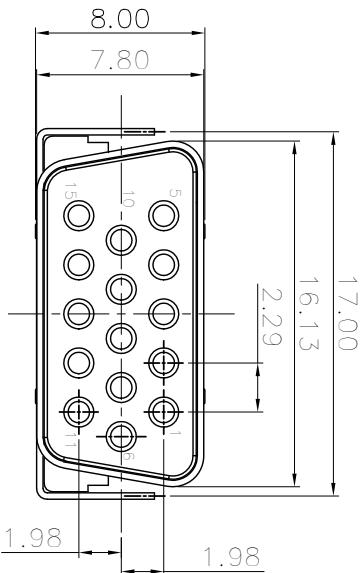

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1.1 Insulation Resistance: 100MΩ Min
- 1.2 Contact Resistance: 40mΩ Max
- 1.3 Dielectric Withstanding Voltage: 500V AC
- 1.4 OPERATING TEMPERATURE: -40°C ~ 85°C
- 2. MECHANICAL CHARACTERISTICS:
- 2.1 MATING FORCE: 45N Max
- 2.2 UNMATED FORCE: 4.5N Min
- 2.3 DURABILITY: 5,000 CYCLES
- 3. ENVIRONMENTAL
- TEMPERATURE RANGE -40°C ~ +85°C

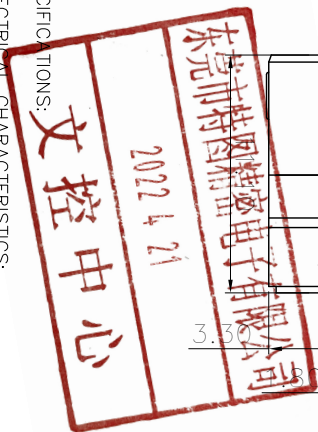

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	KEN	2017.11.14

C	SHELL	1	SPCC 0.35t	NI PLATING
B	CONTACT	15	COPPER ALLOY 0.30t	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated.
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X : ±0.5 X : ±2°				
X.X : ±0.3 X.X : ±1°				
X.XX : ±0.2				
TITLE: VGA 15P/F 插座反向 针板式 (超薄)				
PART NO. 1191512AT001				
DWG KEN 2017.11.14				
CHKD				
APVD				
SCALE 1:1 UNIT: mm				
CUSTOMER COPY SIZE: A4 SHEET: 10F1 REV: A				