


TABLE:

BLACK	1020433AT010
WHITE	1020433AT009

- NOTE:
- ELECTRICAL CHARACTERISTICS
    - 1-1. VOLTAGE RATING: 30V MAX
    - 1-2. CURRENT RATING: 2.0A MAX
    - 1-3. CONTACT RESISTANCE: 30 milliohms MAX.
    - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
    - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
  - MECHANICAL CHARACTERISTICS
    - 2-1. MATING FORCE: 35N MAX
    - 2-2. UNMATING FORCE: 10N MIN
    - 2-3. DURABILITY: 5000 CYCLES
  - SALT SPRAY: 24H
  - OPERATING TEMPERATURE: -40°C~+85°C
  - RoHS 2002/95/EC COMPLIANT.
  - MPQ : 100PCS/TRAY.

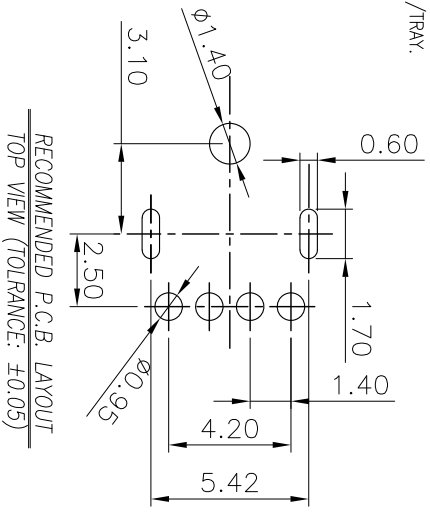

C	SHIELD	1	SPCC 0.30T	Ni PLATING
B	TERMINAL	4	C2680 0.25t	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated.
A	HOUSING	1	PBT	SEE TABLE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X : ±0.5	X : ±2°
X.X : ±0.3	X.X : ±1°
X.XX : ±0.2	

TITLE:  
USB A/B 4P侧插式短体10.0直边

PART NO.	1020433AT009/010
DWN	BROKEN
CHKD	2017.03.10
APVD	

SCALE 1:1 UNIT: mm SHEET: 10F1 REV: A

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A		PRODUCT RELEASE	BROKEN	2017.03.10

