
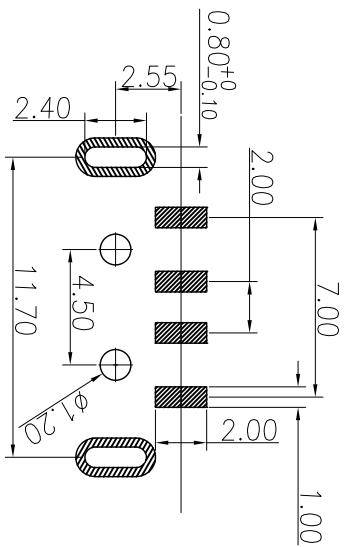
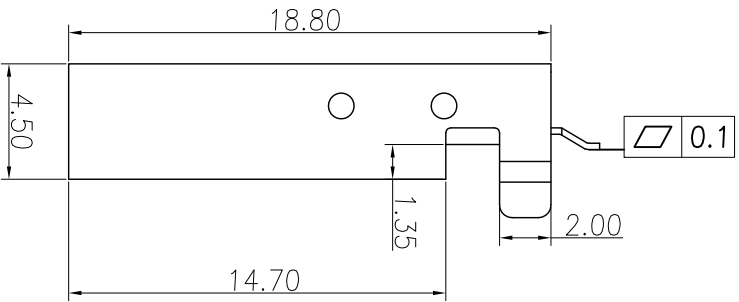


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

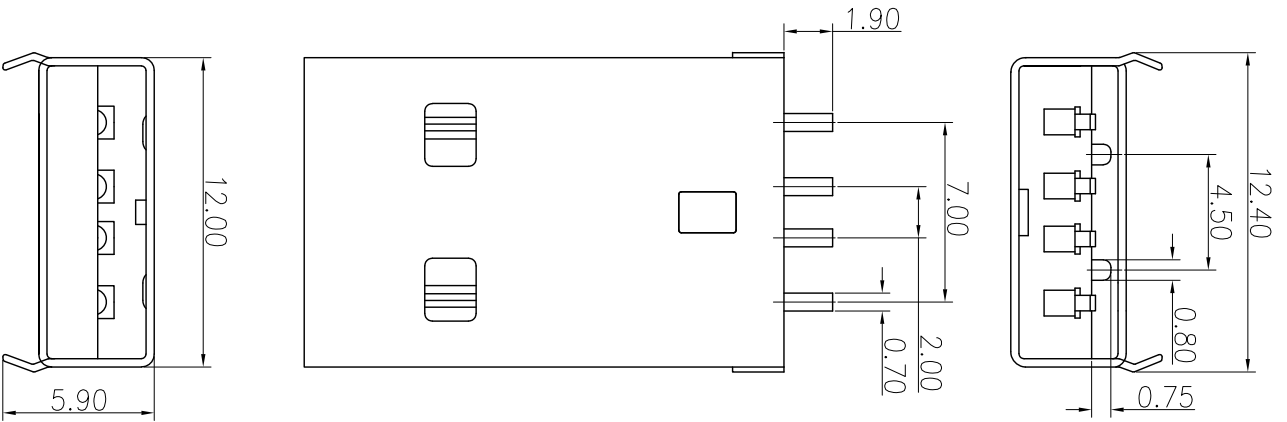

NOTE:

1. ELECTRICAL CHARACTERISTICS
  - 1-1. VOLTAGE RATING: 30V MAX
  - 1-2. CURRENT RATING: 2.0A MAX
  - 1-3. CONTACT RESISTANCE: 30 milliohms MAX.
  - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
  - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
- FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
  - 2-1. MATING FORCE: 35N MAX
  - 2-2. UNMATING FORCE: 10N MIN
  - 2-3. DURABILITY: 5000 CYCLES
3. SALT SPRAY: 24H
4. OPERATING TEMPERATURE: -40°C~85°C
5. RoHS 2002/95/EC COMPLIANT.
6. MPQ : 100PCS/TRAY.

RECOMMENDED P.C.B LAYOUT  
TOLERANCE ±0.05

TABLE:

BLACK	1020408AT002
WHITE	1020408AT001
COLOR	P/N

C	SHELL	1	SPCC		
B	TERMINAL	4	COPPER ALLOY	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated.	
A	HOUSING	1	THERMOPLASTIC U94-10	SEE TABLE	
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR	

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X : ±0.5	X : ±2°
X.X : ±0.3	X.X : ±1°
X.XX : ±0.2	

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A		PRODUCT RELEASE	BROKEN	2018.5.14

TITLE: USB 2.0 AM 4P SMT沉板1.35  
零插铁壳

PART NO.	1020408AT001&002
DWN	BROKEN
CHKD	2018.5.14
APVD	

SCALE 1:1 UNIT: mm SHEET: 10F1 REV: A

CUSTOMER COPY