


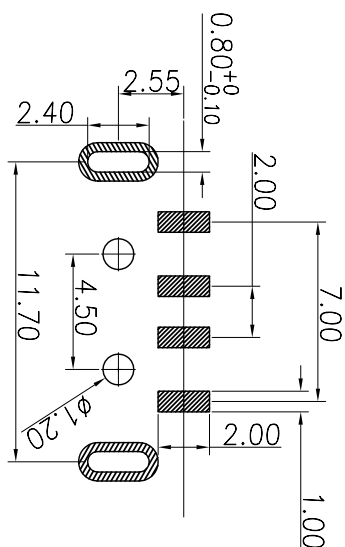

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 30V MAX
 - 1-2. CURRENT RATING: 20A MAX
 - 1-3. CONTACT RESISTANCE: 30 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC

2. MECHANICAL CHARACTERISTICS
- 2-1. MATING FORCE: 35N MAX
- 2-2. UNMATING FORCE: 10N MIN
- 2-3. DURABILITY: 5000 CYCLES
3. SALT SPRAY: 24H
4. OPERATING TEMPERATURE: -40°C~85°C
5. RoHS 2002/95/EC COMPLIANT.
6. MPQ : 100PCS/TRAY.

C	SHELL	1	SPCC		Gold Flash On Contact Area Tin plated on Solder toll All over Nickel Plated .
B	TERMINAL	4	COPPER ALLOY		
A	HOUSING	1	TERMOPLASTIC UL94-V0		SEE TABLE
NO	DESCRIPTION	QTY	MATERIAL		PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: USB 2.0 AM 4P SMT 沉板1.35 弯脚铁壳			
DECIMALS:	ANGLES:	PART NO. 1020408T001&002			
X :±0.5	X :±2°	DWN BROKEN 2018.5.14			
X.X :±0.3	X.X :±1°	CHKD			
X.XX :±0.2		APVD			
		SCALE 1:1			
		UNIT: mm			
		CUSTOMER COPY			
		SIZE: A4			
		SHEET: 10F1			
		REV: A			

TITLE: USB 2.0 AM 4P SMT沉板1.35
弯脚铁壳

PART NO.	1020408AT001&002
----------	------------------

OWN	BROKEN	2018.3.14
OWN		

שם	
אב	

SCALE 1:1	1 IN
-----------	------

SIZE: A4	SHE
----------	-----

--	--

TEST 1

Introduction