

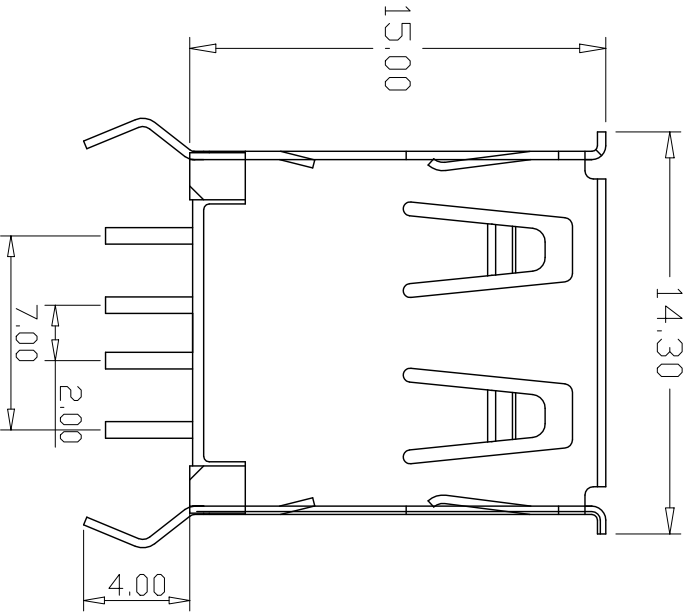
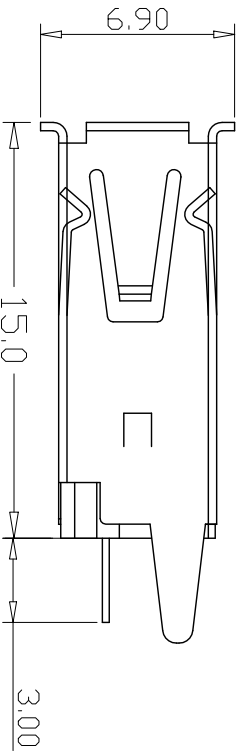
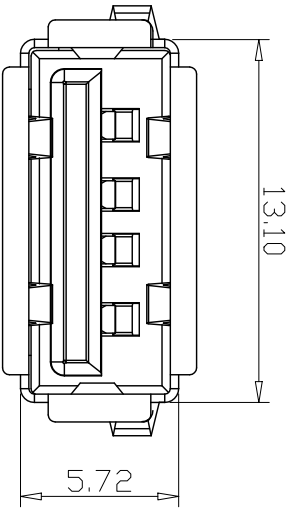


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

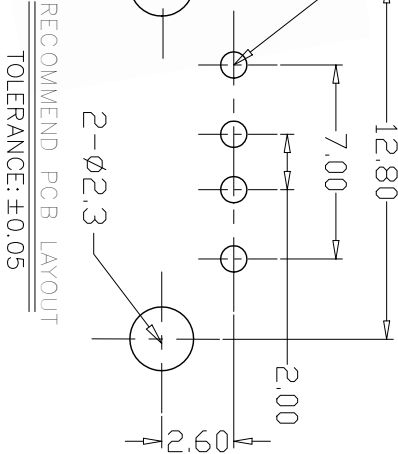

NOTE:

- 1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 30V MAX
 - 1-2. CURRENT RATING: 2.0A MAX
 - 1-3. CONTACT RESISTANCE: 30 milliohms MAX
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- 2. MECHANICAL CHARACTERISTICS
 - 2-1. MATING FORCE: 35N MAX
 - 2-2. UNMATING FORCE: 10N MIN
 - 2-3. DURIBILITY: 5000 CYCLES
 - 3. SALT SPRAY: 24H
 - 4. OPERATING TEMPERATURE: -40°C~85°C
 - 5. RoHS 2002/95/EC COMPLIANT.
 - 6. MPQ : 100PCS/TRAY.

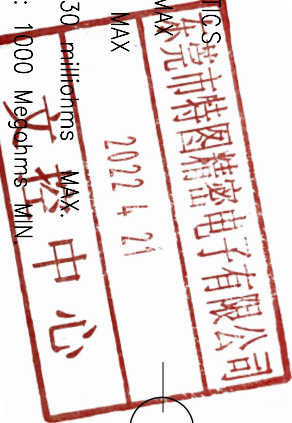

RECOMMEND PCB LAYOUT TOLERANCE: ±0.05

TABLE:

COPPER ALLOY	BLACK	1020416AT024
COPPER ALLOY	WHITE	1020416AT023
SPCC	BLACK	1020416AT022
SPCC	WHITE	1020416AT021
SHELL	COLOR	P/N

C	SHELL	1	SEE TABLE 0.25t	Ni PLATING
B	TERMINAL	4	COPPER ALLOY 0.25t	Gold Flash On Contact Area Tin plated on Solder Tail All over Nickel Plated.
A	HOUSING	1	Thermoplastic U94-V0	SEE TABLE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X : ±0.5 X : ±2°				
X.X : ±0.3 X.X : ±1°				
X.XX : ±0.2				



TITLE: USB 2.0 A母 4P 立插式
15.0L 卷边弯脚

PART NO.	1020416A10XX
DWN	TOM
CHKD	2011.03.22
APVD	

SCALE 1:1 UNIT: mm

CUSTOMER COPY SIZE: A4 SHEET: 10F1 REV: A

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	TOM	2011.03.22