


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant

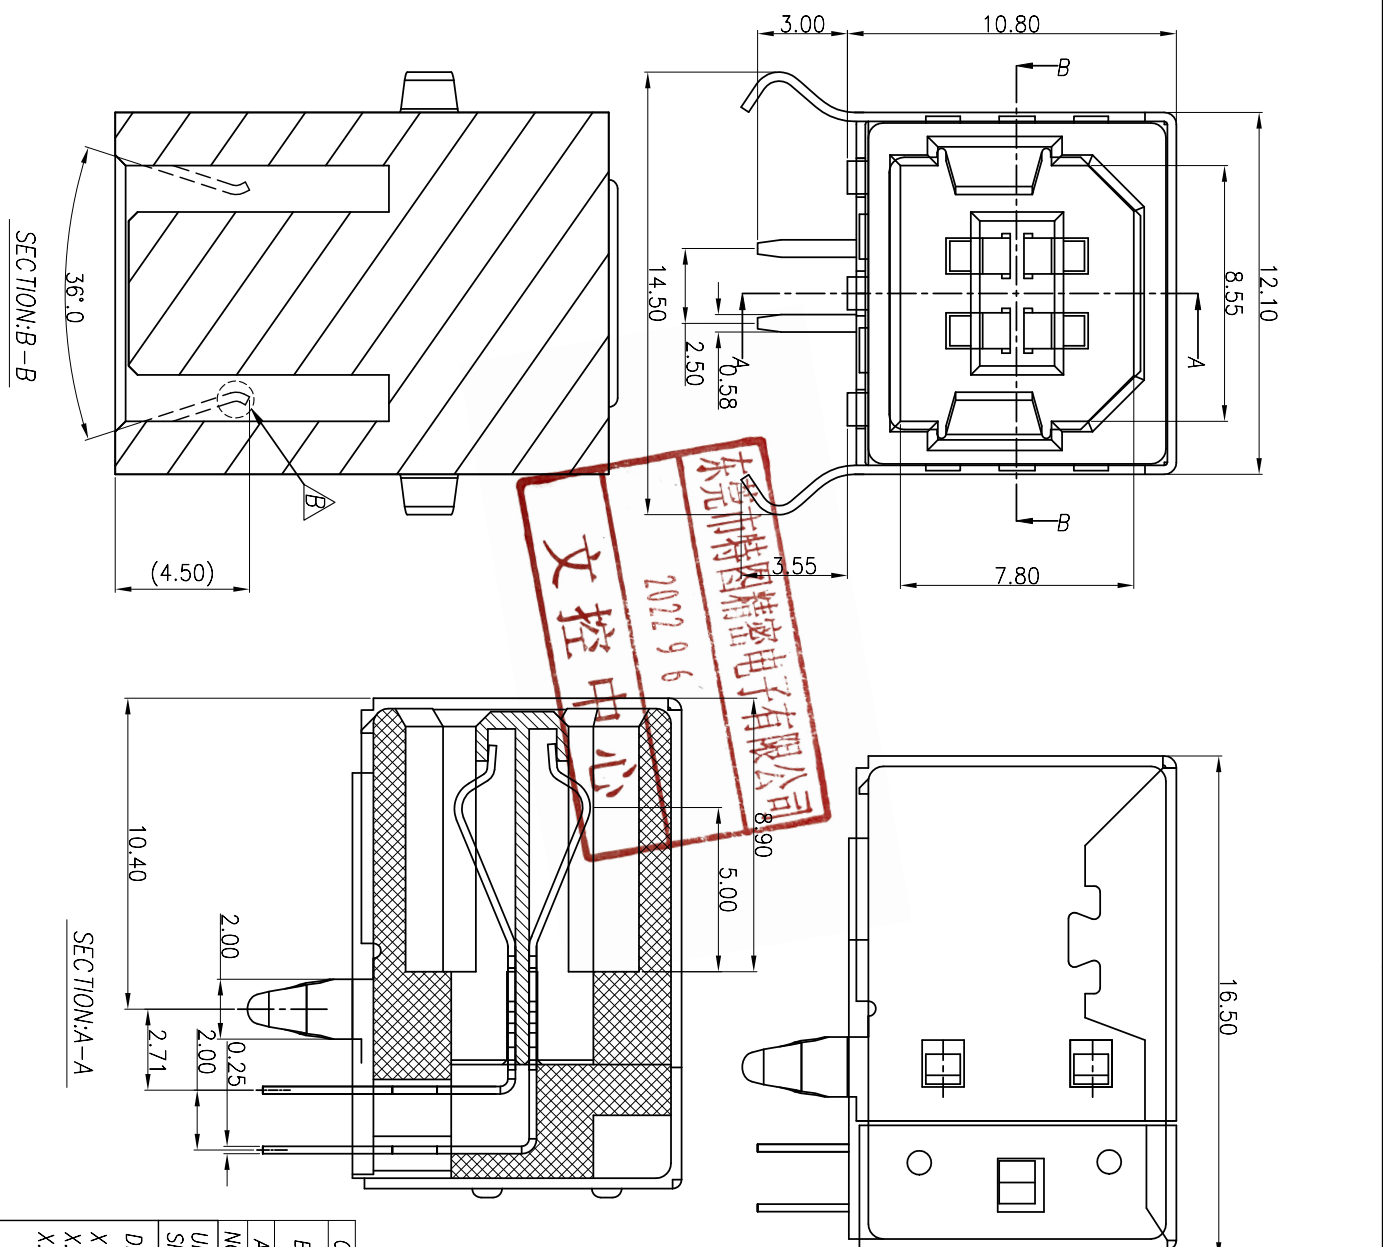

NOTE:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 30V MAX
 - 1-2. CURRENT RATING: 2.0A MAX
 - 1-3. CONTACT RESISTANCE: 30 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
2. MECHANICAL CHARACTERISTICS
 - 2-1. MATING FORCE: 35N MAX
 - 2-2. UNMATING FORCE: 10N MIN
 - 2-3. DURABILITY: 5000 CYCLES
 3. SALT SPRAY: 24H
 4. OPERATING TEMPERATURE: -40°C~85°C
 5. RoHS 2002/95/EC COMPLIANT.
 6. MPQ : 100PCS/TRAY.

FOR 1 MINUTE.

TABLE:

P/N	COLOR	SHIELD
1020403AT004	BLACK	COPPER ALLOY
1020403AT003	WHITE	COPPER ALLOY
1020403AT002	BLACK	SPCC
1020403AT001	WHITE	SPCC

NI PLATING
Gold Flash on Contact Area
Tin plated on Solder tail
All over Nickel Plated.

C	SHIELD	1	SEE TABLE	NI PLATING
B	TERMINAL	4	COPPER ALLOY 0.25t	Gold Flash on Contact Area Tin plated on Solder tail All over Nickel Plated.
A	HOUSING	1	TEMPERATURE PLASTIC US94-V0	SEE TABLE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:		ANGLES:		
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE: USB BIF 4P 90° DIP TYPE		PART NO. 1020403AT00X		
CUSTOMER COPY		DWG BROKEN 2022.08.14		
SCALE 1:1		UNIT: mm		
SIZE: A4		SHEET: 10F1		
		REV: B		

REV.	ECN	NO	OR DESCRIPTION	REVISED	DATE
A	PRODUCT	RELEASE	BROKEN	2012.06.27	
B	MODIFY	SHELL SPRING	BROKEN	2022.08.14	