
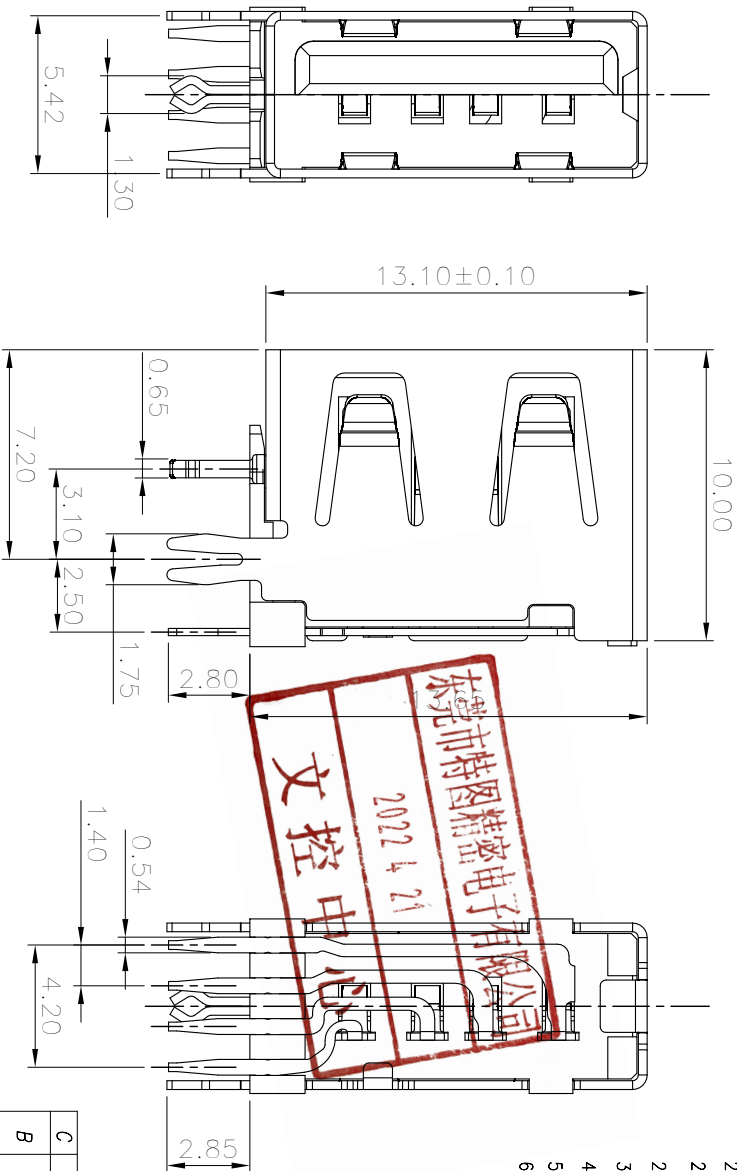


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant

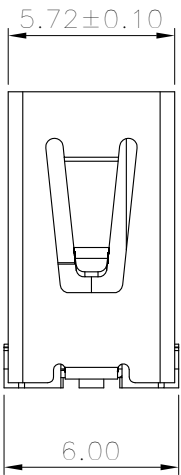

东莞市特图精密电子有限公司
2022.4.21
文控中心

NOTE:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 30V MAX
 - 1-2. CURRENT RATING: 2.0A MAX
 - 1-3. CONTACT RESISTANCE: 30 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC

FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS
 - 2-1. MATING FORCE: 35N MAX
 - 2-2. UNMATING FORCE: 10N MIN
 - 2-3. DURABILITY: 5000 CYCLES
 3. SALT SPRAY: 24H
 4. OPERATING TEMPERATURE: -40°C~85°C
 5. RoHS 2002/95/EC COMPLIANT.
 6. MPQ : 100PCS/TRAY.

RECOMMENDED P.C.B. LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

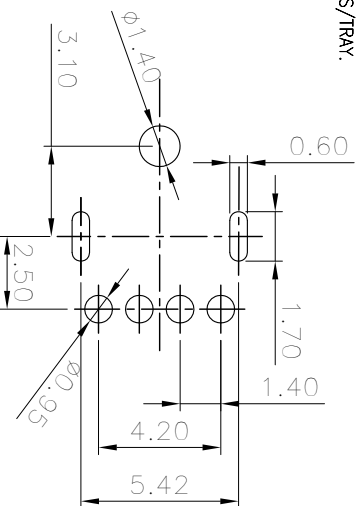


TABLE:

BLACK	1020433AT010
WHITE	1020433AT009

C	SHIELD	1	SPCC 0.30t	Ni PLATING
B	TERMINAL	4	C2680 0.25t	(Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated.)
A	HOUSING	1	PBT	SEE TABLE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	±0.5	X	±2°	
X.X	±0.3	X.X	±1°	
X.XX	±0.2			
TITLE: USB AF 4P侧插式短体10.0直边				
PART NO.		1020433AT009A010		
DWN		BROKEN		
CHKD		2017.03.10		
APVD				
SCALE 1:1		UNIT: mm		
CUSTOMER COPY		SIZE: A4		SHEET: 10/1
		REV: A		

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	BROKEN	2017.03.10