
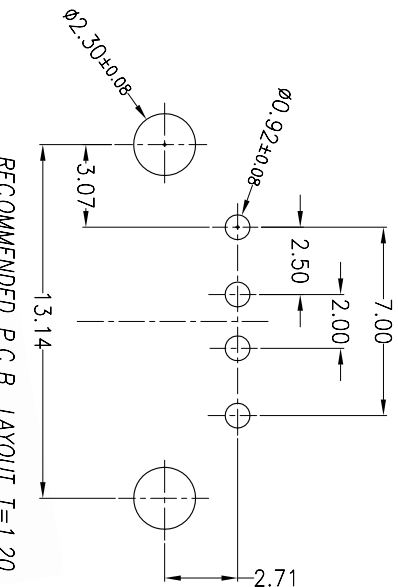


ROHS Compliant

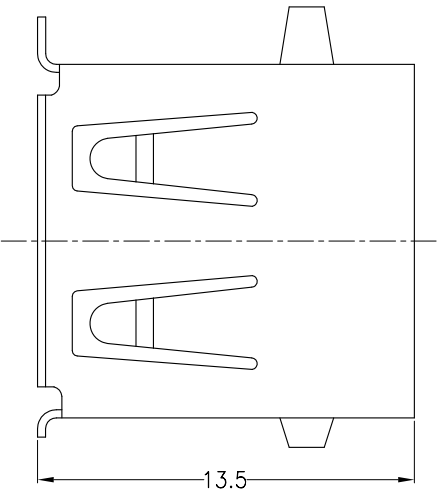

NOTE:

1. ELECTRICAL CHARACTERISTICS
- 1-1. VOLTAGE RATING: 30V MAX
- 1-2. CURRENT RATING: 2.0A MAX
- 1-3. CONTACT RESISTANCE: 30 milliohms MAX.
- 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC

FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS
- 2-1. MATING FORCE: 35N MAX
- 2-2. UNMATING FORCE: 10N MIN
- 2-3. DURABILITY: 5000 CYCLES
3. SALT SPRAY: 24H
4. OPERATING TEMPERATURE: -40°C~85°C
5. RoHS 2002/95/EC COMPLIANT.
6. MPQ : 100PCS/TRAY.

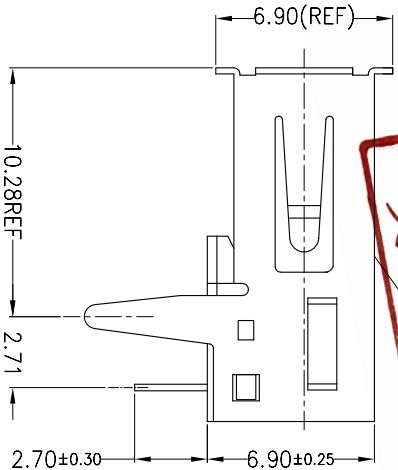
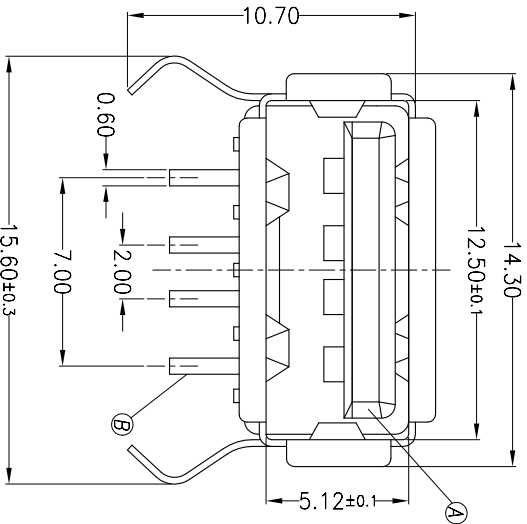
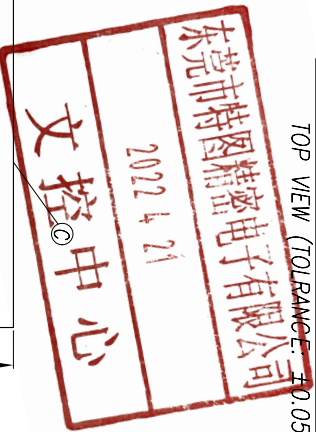




TABLE:

COPPER ALLOY	BLACK	1020401AT101
COPPER ALLOY	WHITE	1020401AT104
SPCC	BLACK	1020401AT1001
SPCC	WHITE	1020401AT1004
SHELL	COLOR	P/N

C	SHELL	1	SEE TABLE	Ni PLATING
B	TERMINAL	4	COPPER ALLOY	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	THERMOPLASTIC UL94-V0	SEE TABLE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:			
X : ±0.5	X : ±2°			
X.X : ±0.3	X.X : ±1°			
X.XX : ±0.2				
 TEL: 010-60413333  SCALE 1:1				
CUSTOMER COPY				
TITLE: USB AF 4P 90D DIP STD (弯脚插边)				
PART NO.		1020401ATXXX		
DWN		ARES		
CHKD				
APVD				
SCALE 1:1		UNIT: mm		
SIZE: A4		SHEET: 10F1		REV: A