

ROHS Compliant

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.



2

3

4


5

6

7

8

TETULL CORPORATION

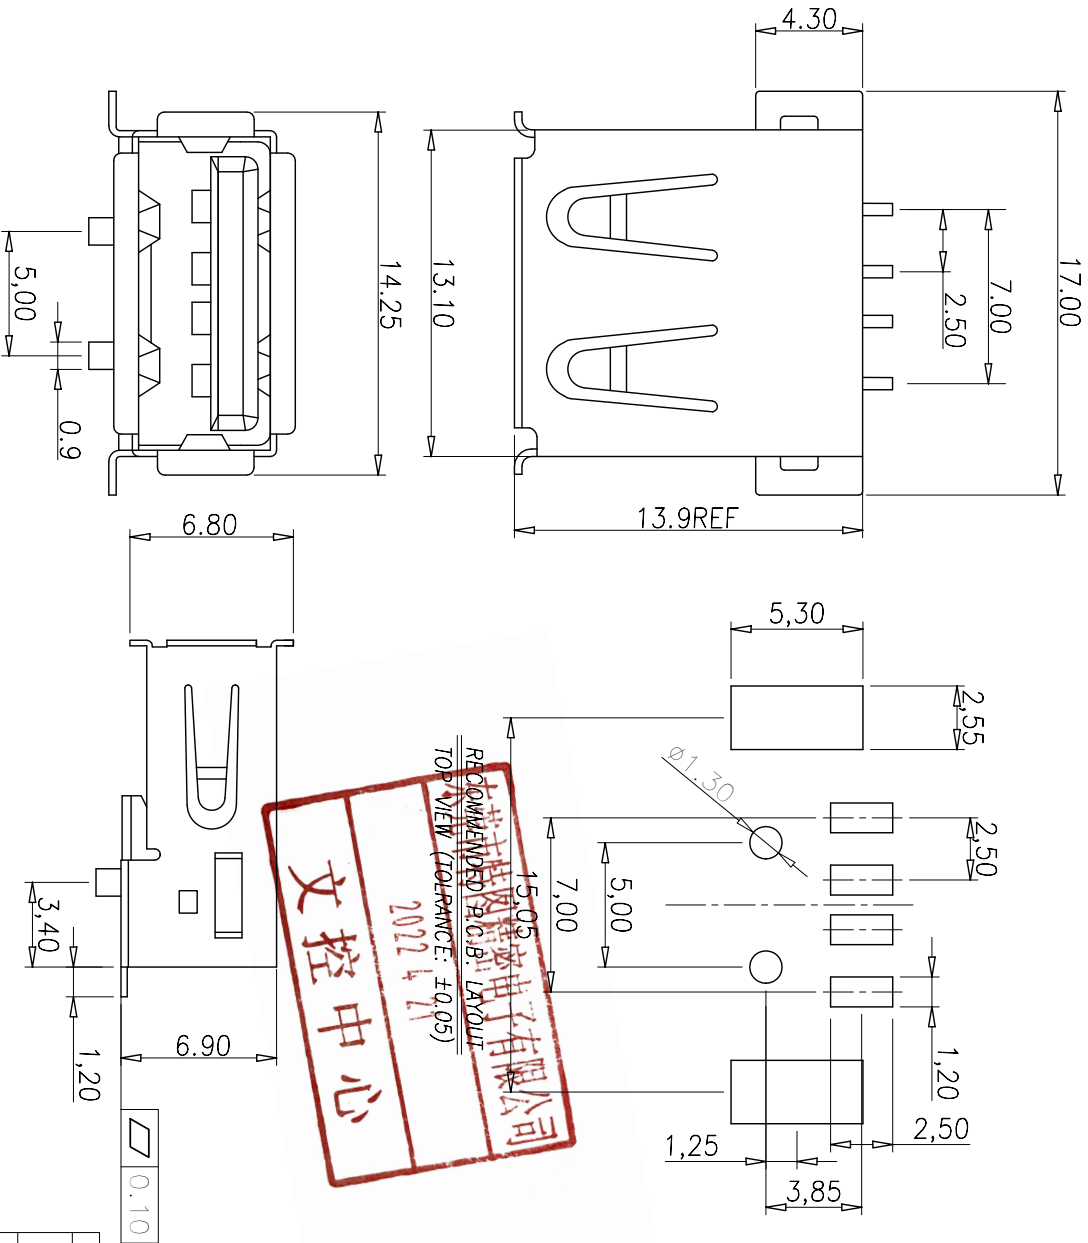

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	TOM	2011.03.22

NOTE:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 30V MAX
 - 1-2. CURRENT RATING: 2.0A MAX
 - 1-3. CONTACT RESISTANCE: 30 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS
 - 2-1. MATING FORCE: 35N MAX
 - 2-2. UNMATING FORCE: 10N MIN
 - 2-3. DURABILITY: 5000 CYCLES
 3. SALT SPRAY: 24H
 4. OPERATING TEMPERATURE: -40°C~85°C
 5. RoHS 2002/95/EC COMPLAINT.
 6. MPQ : 100PCS/TRAY.

C	SHELL	1	SPCC
B	TERMINAL	4	COPPER ALLOY
A	HOUSING	1	THERMOPLASTIC UL94-V0
NO	DESCRIPTION	QTY	MATERIAL
UNLESS OTHERWISE SPECIFIED TOLERANCES			
DECIMALS: ANGLES:			
X	±0.5	X	±2°
X.X	±0.3	X.X	±1°
X.XX	±0.2		



TITLE: USB 2.0 A母 4P 卧式全
贴边铁壳

PART NO. 1020401AT007&008&AR007

DWN TOM 2011.03.22

CHKD

APVD

SCALE 1:1

CUSTOMER COPY SIZE: A4

SHEET: 10F1

REV: A