


ROHS Compliant

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

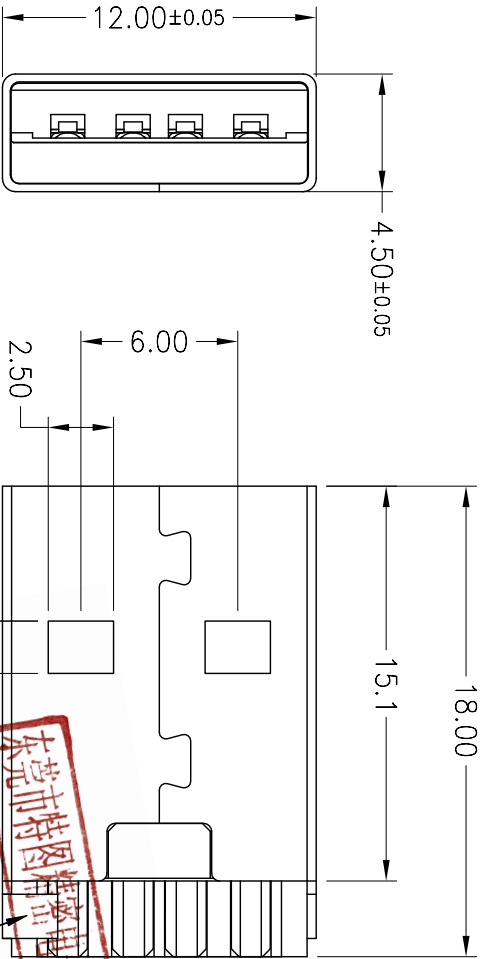

- NOTE:
- ELECTRICAL CHARACTERISTICS
 - VOLTAGE RATING: 30V MAX
 - CURRENT RATING: 2.0A MAX
 - CONTACT RESISTANCE: 30 milliohms MAX.
 - INSULATION RESISTANCE: 1000 Megohms MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
 - MECHANICAL CHARACTERISTICS
 - MATING FORCE: 35N MAX
 - UNMATING FORCE: 10N MIN
 - DURABILITY: 5000 CYCLES
 - SALT SPRAY: 24H
 - OPERATING TEMPERATURE: -40C~85C
 - Rohs 2002/95/EC COMPLIANT.
 - MPQ : 1000PCS/BAG.

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JAMES	2018.01.24
B	MODIFY	BROKEN	2020.11.05

C	SHIELD	1	SPCC	NI PLATED
B	TERMINAL	4	BRASS	3u" Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	PBT HALOGEN FREE	
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
 TITLE: USB A母插线式插座PIN4与外壳短路 PART NO. 1020425AP008 DWN BROKEN 2020.11.05 CHKD APVD SCALE 1:1 UNIT: mm SIZE: A4 SHEET: 10F1 REV: A				
CUSTOMER COPY				

TETULL

TETULL CORPORATION