


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

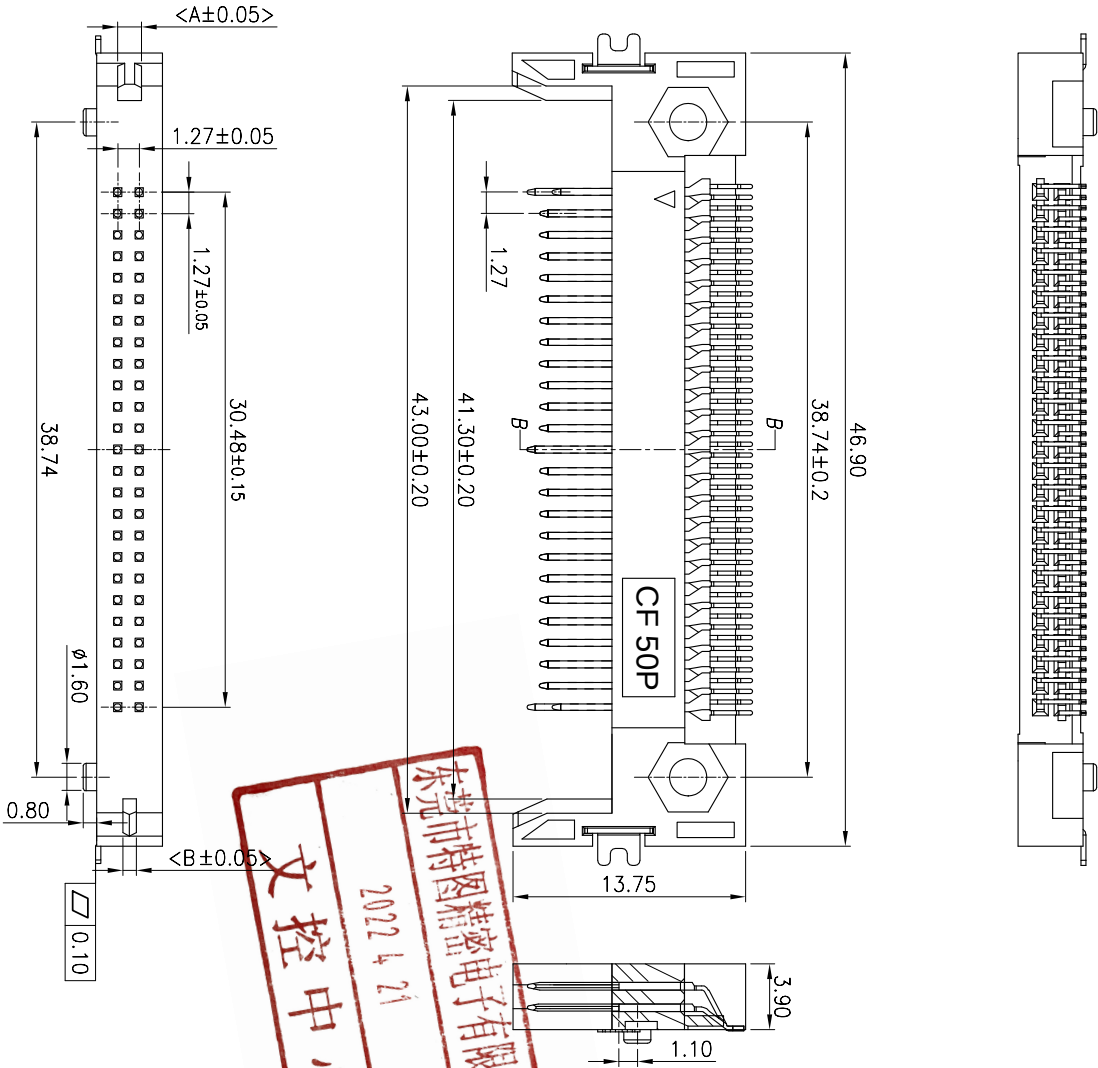

P/N	NOTES	DIM.A	DIM.B
1085003AT003	CF CARD 50P板上臂长13.75	1.35	0.70
1085003AT004	CF CARD 50P板下臂长13.75	0.70	1.35

C	FIXING	2	COPPER ALLOY 0.30t	Tin plated on Solder tail
B	CONTACT	50	COPPER ALLOY 0.40t	All over Nickel Plated Solid Finish on Contact Area
A	HOUSING	1	THERMOPLASTIC UL94-V0	Molte-Tin plated on Solder
NO	DESCRIPTION	QTY	MATERIAL	AWG#18 Nickel Plated
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE: CF CONN 50P (M) SMT Normal OFFSET 1.4 L=13.75				
PART NO. 1085003AT00X				
DWG. TOM 2012.02.23				
CHKD. APVD				
SCALE 1:1 UNIT: mm				
CUSTOMER COPY SIZE: A4 SHEET: 10/11 REV: A				

- SPECIFICATIONS:
1. Current Rating: 0.5A AC,DC
 2. Contact Resistance: 40mΩ max
 3. Insulation Resistance: 1000MΩ min
 4. Withstanding Voltage: 500VAC/minute
 5. TEMPERATURE RANGE -40°C ~ +85°C

