
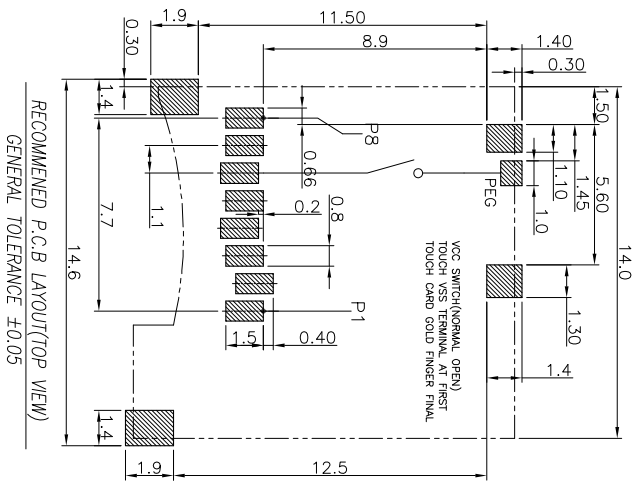
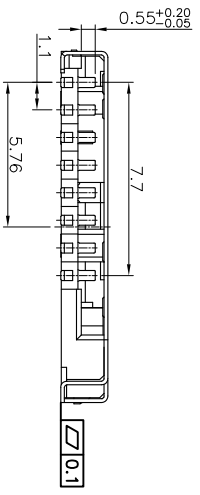
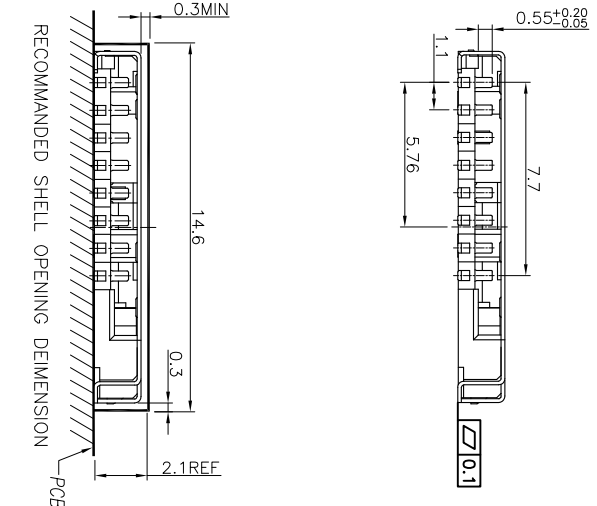
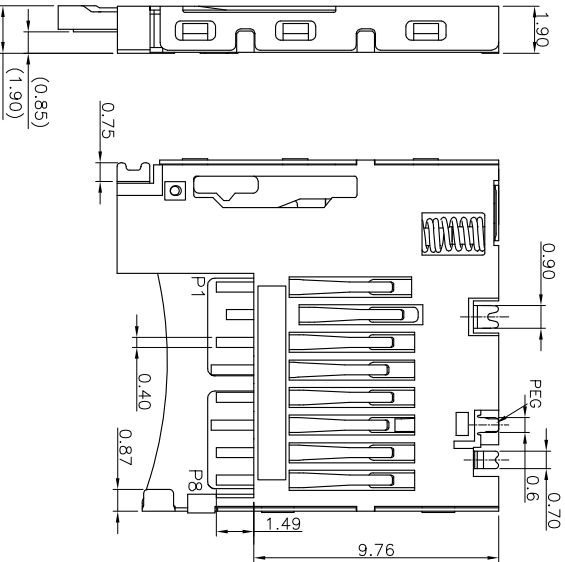



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

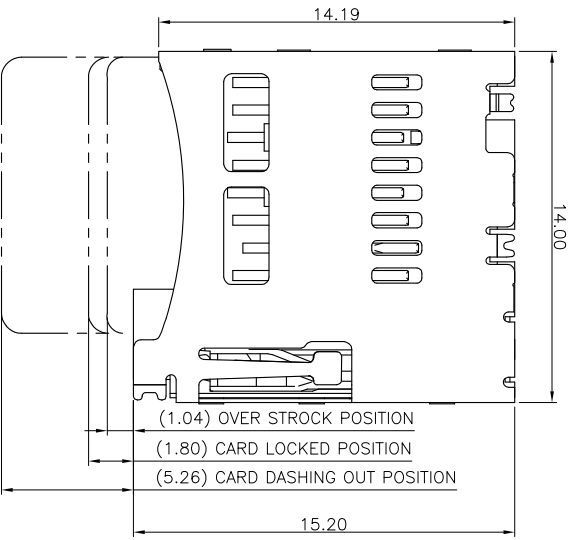

| Pin No. | Pin assignment |
|---------|----------------|
| PIN1 | DAT2 |
| PIN2 | CD/DAT3 |
| PIN3 | CMD |
| PIN4 | VDD |
| PIN5 | CLK |
| PIN6 | VSS |
| PIN7 | DATO |
| PIN8 | DAT1 |

NOTE:

- ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 10V DC.
 - 1-2. CURRENT RATING: 0.5 A.
 - 1-3. CONTACT RESISTANCE: 80 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS
 - 2-1. RETENTION FORCE: 100gf MIN./PIN.
 - 2-2. DURABILITY:5000 CYCLES.
 - 3. SALT SPRAY: 24H.
 - 4. OPERATING TEMPERATURE:-40°C~85°C.
 - 5. RoHS 2002/95/EC COMPLIANT.
 - 6. MPQ : 1000PCS/REEL.



| REV. | ECN NO OR DESCRIPTION | REVISED | DATE |
|------|-----------------------|---------|------------|
| B | MODIFY | BROKEN | 2012.10.13 |
| C | MODIFY | BROKEN | 2022.12.21 |

| | | | | |
|---|-------------|--------------|----------------------------------|--|
| G | SPRING | 1 | SMP | |
| F | GUIDE PIN | 1 | STAINLESS STEEL 0.15t | |
| E | PEG | 1 | COPPER ALLOY 0.15t | AU PLATING |
| D | SLIDE | 1 | TEMPERATURE PLASTIC U194-W0 | BLACK |
| C | SHELL | 1 | STAINLESS STEEL 0.15t | NI PLATING |
| B | CONTACT | 8 | COPPER ALLOY 0.15t | Gold flash all over, All over Nickel Plated. |
| A | HOUSING | 1 | HIGH-TEMPERATURE PLASTIC U194-W0 | BLACK |
| NO | DESCRIPTION | QTY | MATERIAL | PLATING & COLOR |
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | | | |
| DECIMALS: | | ANGLES: | | |
| X | :±0.5 | X | :±2° | |
| X.X | :±0.3 | X.X | :±1° | |
| X.XX | :±0.2 | | | |
| TITLE: T-FLASH CONN PUSH TRP(Normal Open) | | | | |
| PART NO. | | 1060802GR002 | | |
| DWG | | BROKEN | | |
| CHKD | | 2022.12.21 | | |
| APVD | | | | |
| SCALE 1:1 | | UNIT: mm | | |
| SIZE: A4 | | SHEET: 10F1 | | |
| CUSTOMER COPY | | REV: C | | |

